




# ORvent®

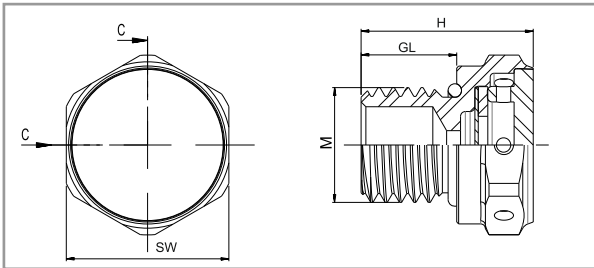

## VENTILATION PLUGS STAINLESS STEEL

### TECHNICAL DETAILS

#### Material

Cap & body	: Stainless Steel (ASISI 303/316L)
Washer	: NBR / EPDM
Vent Part	: Acrylic Co-Polymer on Nylon Support (Hydrophobic-Oleophobic)
<b>Connection thread</b>	: Metric (EN 60423)
<b>Certificates</b>	: ROHS,CE,PT,TUV
<b>Protection class</b>	: IP68
<b>Temperature range</b>	: -20 °C +100 °C -30 +150 °C (short term)

#### Benefits


- Balance the pressure inside and outside of your systems
- Prevents corrosion and water condensation inside the enclosure
- Extend the lifetime of your product
- Various air flows
- Easy to assemble
- High chemical resistance

#### Applications

- Industrial and electronic applications
- Wind & Solar applications
- Lighting Industry, Food & Beverage Industry
- Automotive & Automation technology
- Railway industry

### VENTILATION PLUGS

PRODUCT RANGE OVERVIEW

AG Thread	Code	H mm	GL mm	 mm	Thread Diameter mm	Hole Diameter mm	Average Air Flow l/H	Water Intrusion bar
M 4 x 0,70	OMSVP4UH	10	3	12	4	4,2	70	0,1
M 8 x 1 25	OMSVP8UH	13	6	12	8	8,2	70	0,1
M 10 x 1,5	OMSVP10UH	13	6	12	10	10,2	70	0,1
M 12 x 1,5	OMSVP01S	14	6	17	12	12,3	16	0,8
M 12 x 1,5	OMSVP01M	14	6	17	12	12,3	25	0,5
M 12 x 1,5	OMSVP01H	14	6	17	12	12,3	150	0,2
M 12 x 1,5	OMSVP01UH	14	6	17	12	12,3	300	0,1
M 12 x 1,5	OMSVP01SL	18	10	17	12	12,3	16	0,8
M 12 x 1,5	OMSVP01ML	18	10	17	12	12,3	25	0,5
M 12 x 1,5	OMSVP01HL	18	10	17	12	12,3	150	0,2
M 12 x 1,5	OMSVP01UHL	18	10	17	12	12,3	300	0,1
M 16 x 1,5	OMSVP02S	18	10	19	16	16,3	16	0,8
M 16 x 1,5	OMSVP02M	18	10	19	16	16,3	25	0,5
M 16 x 1,5	OMSVP02H	18	10	19	16	16,3	150	0,2
M 16 x 1,5	OMSVP02UH	18	10	19	16	16,3	300	0,1